

EFFICIENT AIR FILTRATION IN CLEANROOMS - HEPA FILTERS WITH MDF FRAME

FILTER CLASS H 13

FILTER CLASS ACC. TO EN 1822:2009	FILTER CLASS ACC. TO ISO 29463	FRAME DEPTH [mm]	PLEAT DEPTH [mm]	STANDARD DIMENSIONS [mm]	GASKET [mm]
H 13	ISO 35H	78	50	305×305	6
H 13	ISO 35H	150	50 125	305×610 457×457	6
H 13	ISO 35H	292	200	610×610	6



The application

Viledon® HEPA filters of filter class H 13 are used in intake, exhaust and recirculated air filtration in air-conditioning systems with stringent requirements for clean air quality and sterility, e. g.

- in sophisticated air-conditioning technology (operating theaters, intensive care units in hospitals, laboratories, cleanrooms, etc.)
- in sensitive industrial processes
- as final filters in ceiling air outlets
- as "police filters" in dust removal systems

The special features and benefits

- High-efficiency micro-glass-fiber papers are used as filter media.
- The MiniPleat technology employed ensures flow-friendly geometry and equidistance of the pleats, with ho-



homogeneous media velocity coupled with a very low pressure drop. This means particularly cost-efficient and dependable operation plus a quasi-laminar outflow.

- The frame consists of MDF (medium-density fiber board) and is fully incinerable.
- The entire filter element is non-corroding and easy to dispose of, as it is metal-free.
- Protection grids on request.
- Continuous, homogeneously foamed-on polyurethane gasket; on request also available with a flat gasket.
- Each filter element is tested for leak-proofing in accordance with EN 1822, and delivered together with the corresponding test certificate.

* Most Penetrating Particle Size

** For cost-efficiency or system-specific reasons it may be appropriate to change the filters before reaching the stated final pressure drop. It can also be exceeded in certain applications.

KEY DATA		610×610	457×457	305×610	305×305
Frame depth	mm	78 150 150 292	78 150 150 292	78 150 150 292	78 150 150 292
Pleat depth	mm	50 50 125 200	50 50 125 200	50 50 125 200	50 50 125 200
Nominal volume flow rate ●	m³/h	1,200 1,200 1,700 2,000	630 630 950 1,100	550 550 820 1,000	250 250 400 470
Initial pressure drop	Pa	250	250	250	250
Arrestance efficiency MPPS*	%	≥ 99.95	≥ 99.95	≥ 99.95	≥ 99.95
Recommended final pressure drop**	Pa	600	600	600	600
Max. permissible pressure drop	Pa	1,000	1,000	1,000	1,000
Thermal stability	°C	70	70	70	70
Moisture-resistance (rel. hum.)	%	100	100	100	100

AIRWATEC sa

4700 Eupen, Belgium

Phone +32 (0) 87 598330 | Fax +32 (0) 87 598440


info@airwatec.com | www.airwatec.com



airwatec
AIR AND WATER TECHNOLOGIES

TECHNICAL FILTER TEST DATA TO EN 1822

Initial pressure drop curves

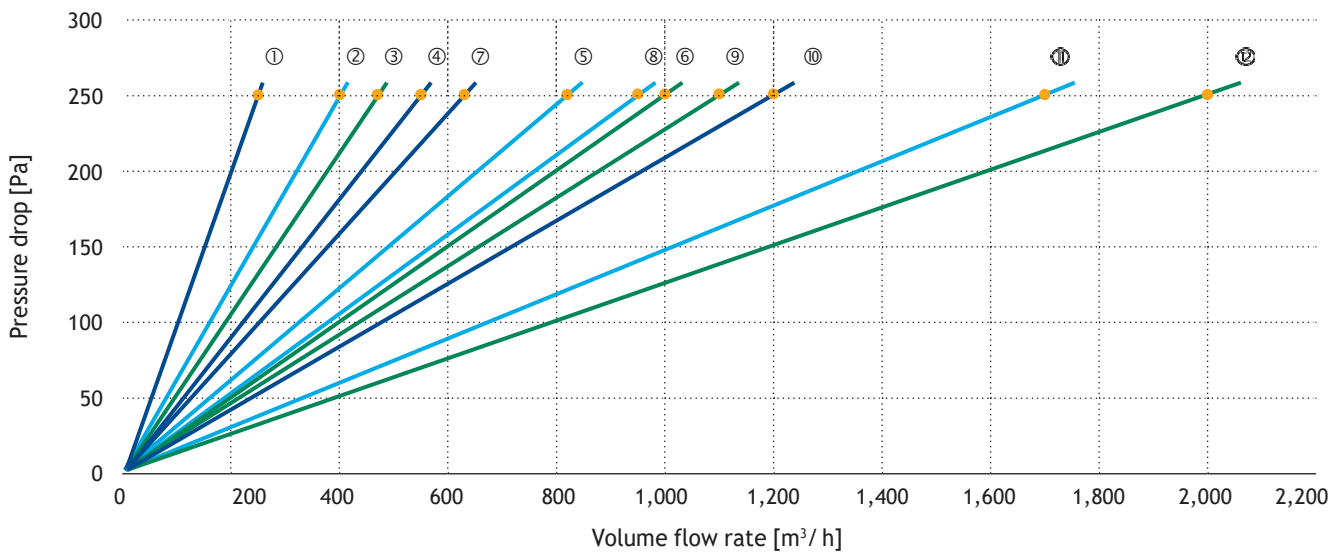

- | | | |
|--|--|--|
| ① 305 mm × 305 mm / Frame depth 78 mm | ⑤ 305 mm × 610 mm / Frame depth 150 mm | ⑨ 457 mm × 457 mm / Frame depth 292 mm |
| ② 305 mm × 305 mm / Frame depth 150 mm | ⑥ 305 mm × 610 mm / Frame depth 292 mm | ⑩ 610 mm × 610 mm / Frame depth 78 mm |
| ③ 305 mm × 305 mm / Frame depth 292 mm | ⑦ 457 mm × 457 mm / Frame depth 78 mm | ⑪ 610 mm × 610 mm / Frame depth 150 mm |
| ④ 305 mm × 610 mm / Frame depth 78 mm | ⑧ 457 mm × 457 mm / Frame depth 150 mm | ⑫ 610 mm × 610 mm / Frame depth 292 mm |

— Pleat depth 50 mm — Pleat depth 125 mm — Pleat depth 200 mm ● Nominal volume flow rate

Item code of product line H 13 (Example)

SF 13 - M - 0610 × 0610 × 292 × 20 - N 1 0 N

▼ ▼ ▼ ▼ ▼ ▼ ▼ ▼ ▼

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- | | | |
|---|--|--|
| ① EPA filter class H 13 | ⑥ Pleat depth [cm]: 2 digits
05 = 50 mm
12 = 125 mm
20 = 200 mm | ⑨ Protection grid:
0 = without
3 = both sides / powder-coated metal mesh |
| ② Frame material:
M = MDF | ⑦ Type of gasket:
N = PU semicircular profile gasket
W = flat gasket | ⑩ Execution:
N = standard
S = special version |
| ③ Frame width [mm]: 4 digits | ⑧ Position of gasket:
1 = one side
3 = both sides | |
| ④ Frame length [mm]: 4 digits | | |
| ⑤ Frame depth [mm]: 3 digits | | |
| ⑥ Faltentiefe [cm]: 2-stellig
05 = 50 mm
12 = 125 mm
20 = 200 mm | | |

The figures given are mean values subject to tolerances due to the normal production fluctuations. Our explicit written confirmation is always required for the correctness and applicability of the information involved in any particular case. Subject to technical alterations. You will find instructions on how to handle and dispose of loaded filters in our information on product safety and eco-compatibility.

AIRWATEC sa

4700 Eupen, Belgium
Phone +32 (0) 87 598330 | Fax +32 (0) 87 598440
info@airwatec.com | www.airwatec.com

